

TRANSPORT GUIDELINES

Hiab basic lift plan

These are general guidelines to understand what will be required for a shipping container to be delivered to your location.

We recommend dealing directly with the haulage company to ensure they have all the information they require to make a successful delivery

TRANSPORT GUIDELINES

Please check exact requirements directly with delivery company.

- 8/10/20ft Delivery**– Deliveries are made using an independent Haulage Company – Your own Independent quotes can be obtained. 38ft long x 9ft wide rigid hi-ab vehicle.
- Clearance**– They will require the vehicle to gain entry to site/location successfully – **28ft clearance in height (to lift) and a minimum of 10ft clearance in width.**
- Site requirements**– Your site must have level, hard standing access
The contracted hauliers will not drive over fields, grass, muddy areas or uneven ground unless pre agreed. If your site has one or more of these problems, they may need further video/photo information or to attend site to carry out a site survey prior to delivery.
Further charges could apply.
- Public offloads**– If you require them to offload the unit whilst being on a public highway, then you may need to **obtain a permit from your local council**, prior to delivery. Please check directly with Haulage company.
- Delivery times**– Due to factors outside their control (traffic, hold up on sites, etc.) they cannot guarantee timed deliveries. All transport is generally made between the hours of 8am– 7pm.
- Satisfaction confirmation**– Please ensure you are satisfied with the container and that the unit is level, doors open/shut correctly and lock works. By signing for the delivery you are confirming unit is satisfactory. If any queries, you must get in touch with the delivery company before driver leaves site.

IMPORTANT

Please ensure delivery company has all the information they need about the delivery location prior to your booking. We always recommend dealing with the haulage company direct to avoid any miscommunications.

You may be required to complete a Checklist with haulage Company.

They may need some notice for any cancellation.

While they make every effort to plan and schedule deliveries based on agreed dates, it is important to note that they **cannot provide a 100% guarantee on delivery dates**. There are factors beyond their control, such as traffic conditions, road closures, driver illness, and unforeseen issues at depots, that may impact the delivery schedule.

We recommend dealing with the haulage company directly so you are kept up to date directly with any changes they schedule.

They will most likely need to be informed of the following:

- Distance from vehicle to Drop Location.
- Underground cables.
- Manhole covers/drains.
- Overhead cables, including the following:
 - Height
 - Type e.g Power, Electrical.
- Overhanging trees e.g. height of branches.
- If the unit will need to be lifted over other containers, fences, walls, buildings and any other obstacles.
- If the unit will need to go inside a building.
- If the unit is to be double stacked on site.


Failure to advise any of the above, may result in a full aborted delivery and collection charge.

Fusion Forest cannot be held responsible for any Aborted Deliveries.

All aborted delivery costs incurred are the buyers responsibility & NOT Fusion Forest.

CONTAINER BASE REQUIREMENTS

1x20' ground work plan

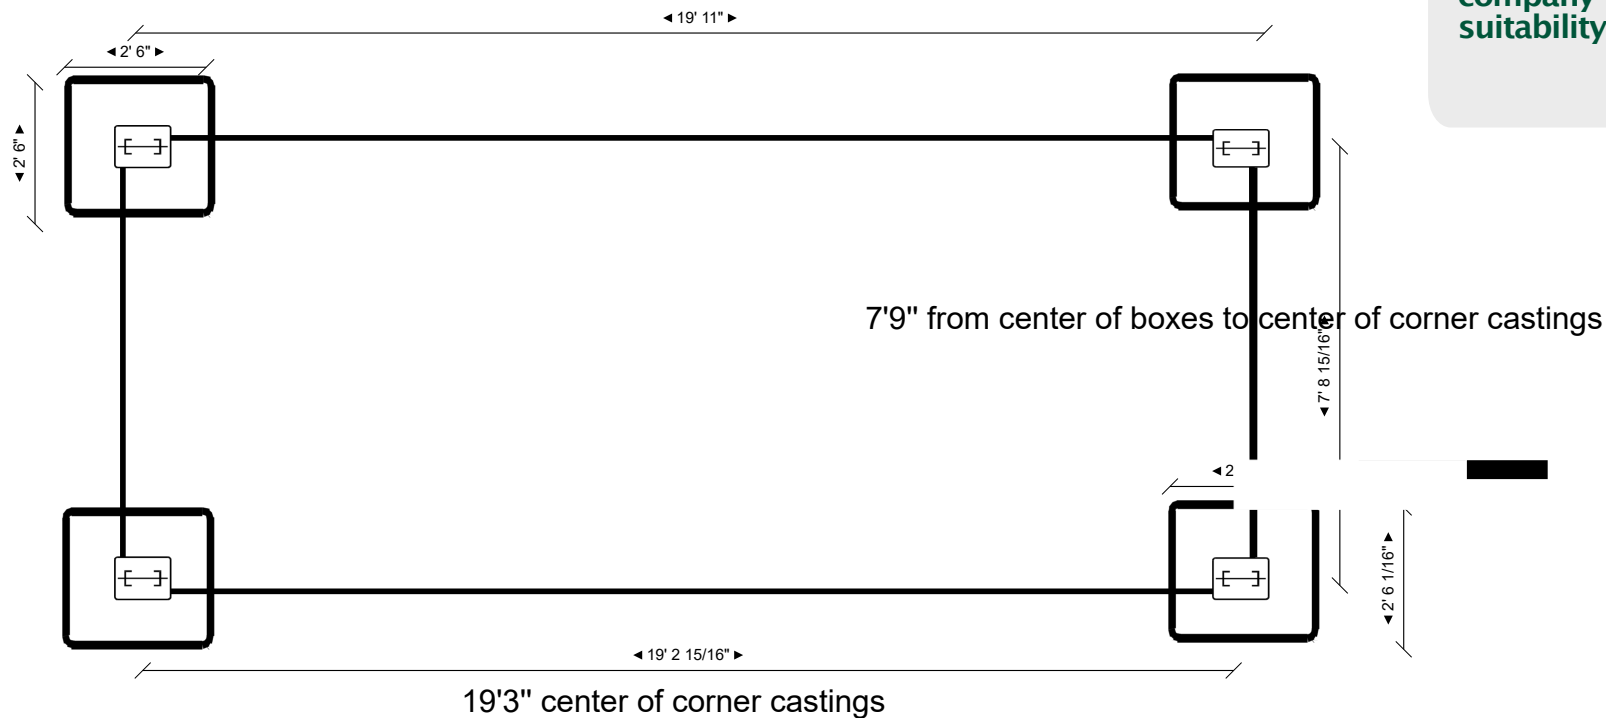

IMPORTANT



Groundworks are the customers responsibility. Any abortion fees will be buyers responsibility if the groundworks are not suitable for the haulier to drive on.

Please check direct with Haulage company your location & suitability.

EXAMPLE DELIVERY REQUIREMENTS

Please check exact requirements directly with delivery company.

- A **11.75m**=Length of lorry
- B **8m**=Clear height of crane
- C **14m**=Crane fully extended
- D **3.8m**=Unloaded lorry height
- E **3m**=Width of lorry
- F **8.4m**=Width between stabiliser legs
- G **2.7m**=Stabiliser leg fully extended
- H **10m**=Clearance between end of load and electrical cables

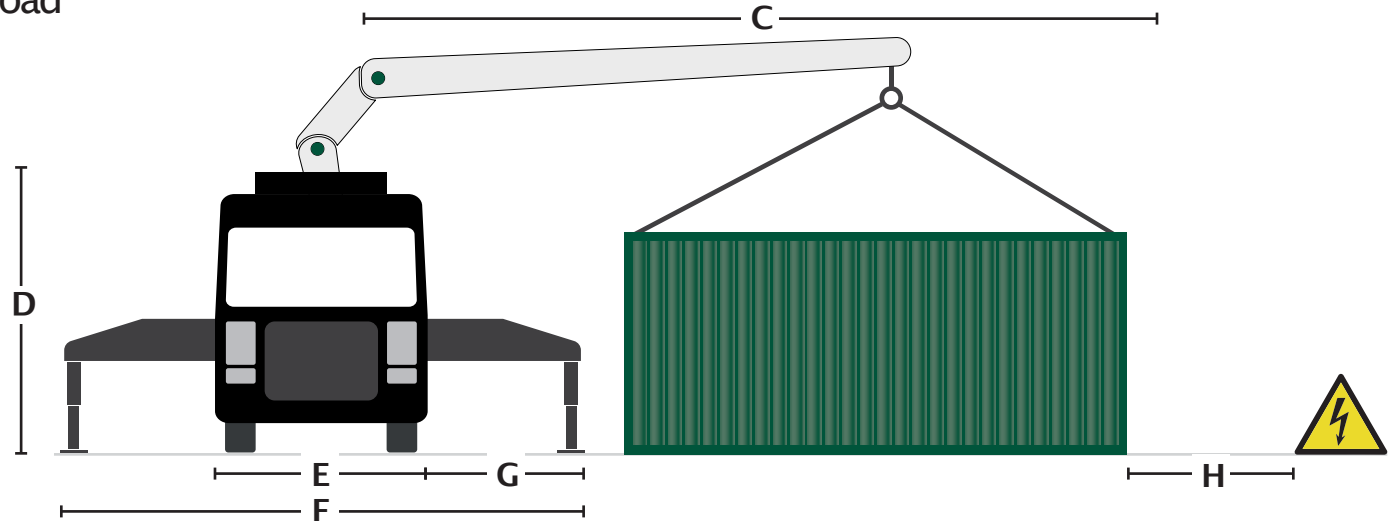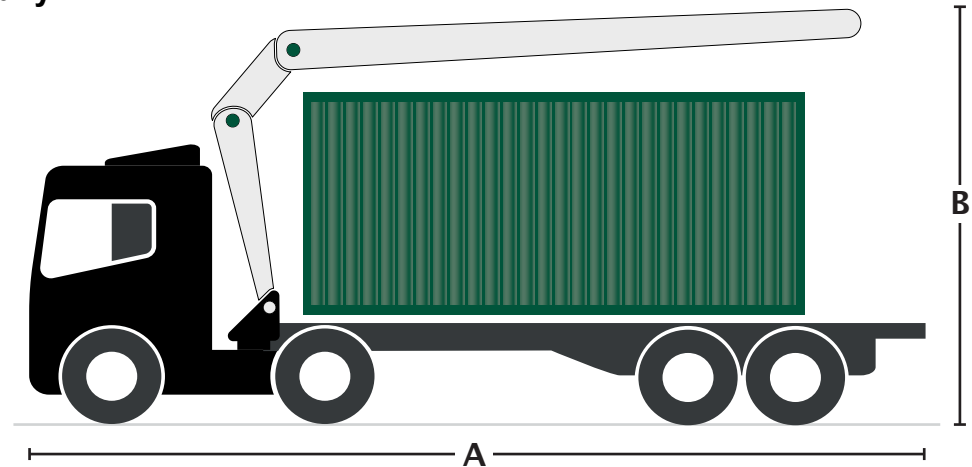

IMPORTANT

Groundworks are the customers responsibility. Any abortion fees will be buyers responsibility if the groundworks are not suitable for the haulier to drive on.